

PURUI FIBER CEMENT FELT




ABOUT US

PURUI .One of the top fiber cement felt manufactory in china. With more than 20 years experience in fiber cement industry. we service more than 80 fiber cement company in china.

we provide Hatschek machine felt and Flow on process machine felt for FC industry. With customer demanded ,we also trade some accessroy for FC company, such as S.S wires mesh,abrasive belt etc..

E-SPEED –HATSCHEK MACHINE FELT

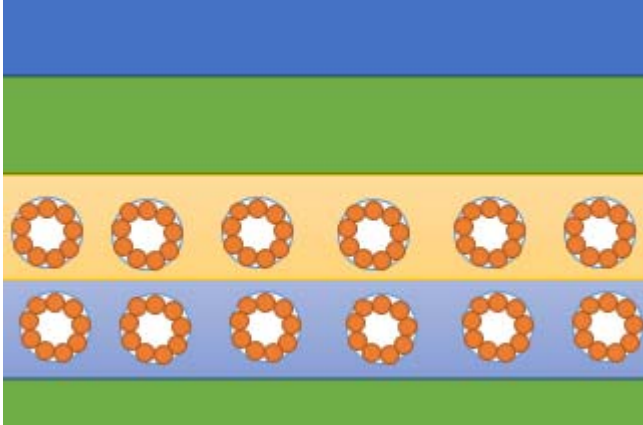
Basis weight	1450-1700 GSM
Base fabric weigh)	750-1000 GSM
Web weight	700 GSM
BASE : WEB	56/ 44
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.5-4.8 mm
Air permeability	75cfm
Treatment	Pre-compaction.
Elongation	About 1-1.5%
<p>Comments:</p> <ul style="list-style-type: none"> 1: Specially surface fiber provide good adhesive property 2: Full speed when new felt changed 3: less vacuum cost 4: Easy to clean and long life time 	

E-SMOOTH –HATSCHEK MACHINE FELT


Basis weight	1700 GSM
Base fabric weigh)	950 GSM
Web weight	750 GSM
BASE : WEB	57/ 43
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.8 mm
Air permeability	85cfm
Treatment	Pre-compaction.
Elongation	About 1- 1.5%

Comments:

- 1: Specially base fabric for smooth property
- 2: Good dewatering
- 3: Easy to clean and long life time

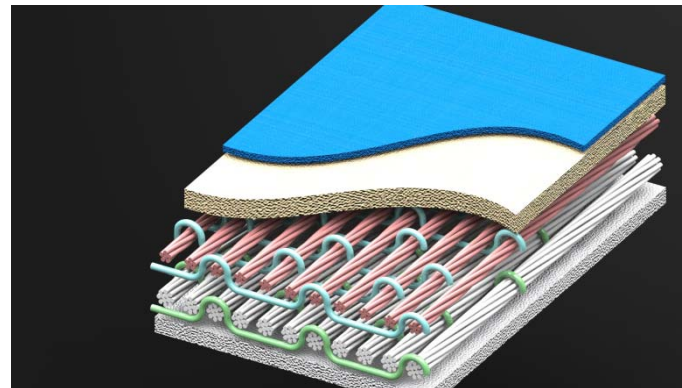

E-MARK –HATSCHEK MACHINE FELT

Basis weight	1700 GSM
Base fabric weigh)	1000 GSM
Web weight	700 GSM
BASE : WEB	59/ 41
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.8 mm
Air permeability	90cfm
Treatment	Pre-compaction.
Elongation	About 1- 1.5%
<p>Comments:</p> <ol style="list-style-type: none"> 1: Can give felt mark on board surface 2: Good dewatering 3: Easy to clean and long life time 	

FE-SPEED –FLOW_ON MACHINE FELT


Basis weight	1700 GSM
Base fabric weigh)	1000 GSM
Web weight	700 GSM
BASE : WEB	59/ 41
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.9
Air permeability	130cfm
Treatment	Pre-compaction.
Elongation	About 1.5% /good strength
<p>Comments:</p> <ul style="list-style-type: none"> 1: Coarse fiber provide good dewatering 2: Easy to clean and long life time 3: The lost of the pulp can be changed by customer demaned 	

FE-SMOOTH –FLOW_ON MACHINE FELT


Basis weight	1700 GSM
Base fabric weigh)	950 GSM
Web weight	750 GSM
BASE : WEB	57/ 43
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.8 mm
Air permeability	110
Treatment	Pre-compaction.
Elongation	About 1- 1.5%

Comments:


- 1: Mark free of the felt
- 2: Good MD strength
- 3: Less vacuum cost

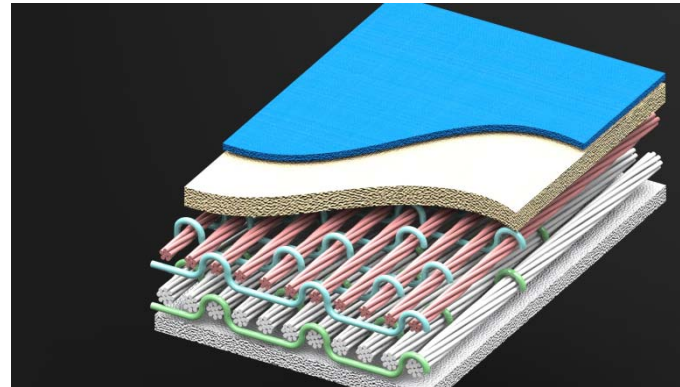

FE-MARK –FLOW_ON MACHINE FELT

Basis weight	1700 GSM
Base fabric weigh)	1000 GSM
Web weight	700 GSM
BASE : WEB	59/ 41
MD Yarn	NYLON PLIED MONO 2 layers
CD Yarn	NYLON PLIED MONO 2 layers
Calliper at dry state	4.8 mm
Air permeability	150cfm
Treatment	Pre-compaction.
Elongation	About 1- 1.5%
<p>Comments:</p> <ol style="list-style-type: none"> 1: Can give felt mark on board surface 2: Good dewatering 3: Easy to clean and long life time 	

The package of the felt

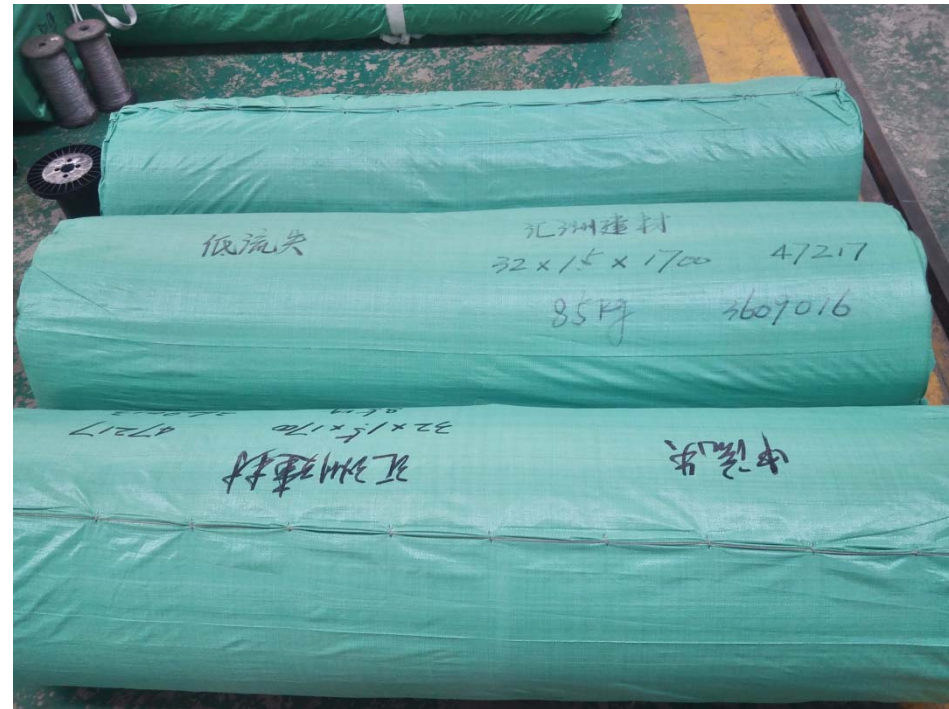

All of the felt can be specially design by customer demanded